


7430.801 Shown

MODEL NUMBER:

- ☐ **7430.801 Berwick Widespread**
Metal Speed Connect® pop-up drain.
Metal lever handles.
- ☐ **7430.821 Berwick Widespread**
Metal Speed Connect® pop-up drain.
Metal cross handles.

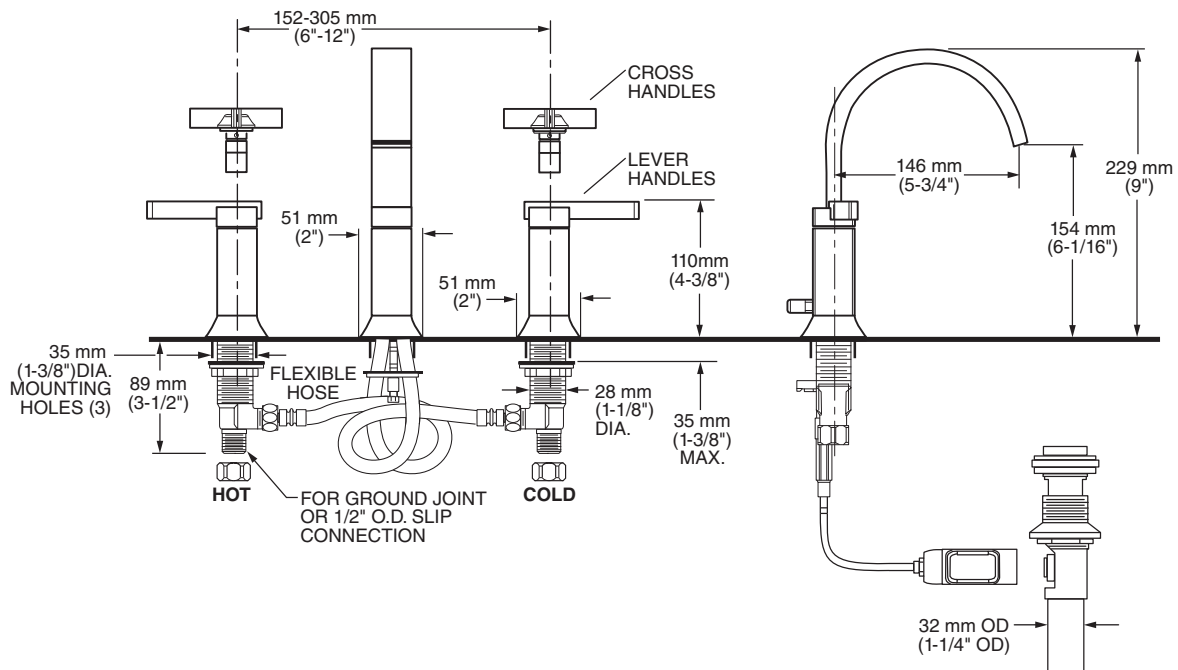

GENERAL DESCRIPTION:

Cast brass valve bodies with flexible hose connections for 6" to 12" (152 to 305 mm) installations. 1/4 turn washerless ceramic disc valve cartridges. Brass spout. Choice of metal lever or metal cross handles. One-half inch male inlet shanks with brass coupling nuts. 20 inch (500 mm) long flexible stainless steel drain cable is pre-assembled to spout. Metal Speed Connect® drain body with 1-1/4 inch (32 mm) tail piece. 1.2 gpm/4.5 L/min. maximum flow rate.

PRODUCT FEATURES:

Brass Construction: Durable. Ideal for prolonged contact with water. Provides the finest surface for application of colors and finishes.

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance.

Exclusive Speed Connect Metal Drain:

- Fewer parts. Installs in less time.
- No adjustments required - seals the first time, every time.
- Flexible stainless steel cable - installs effortlessly in tight spaces.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.


SUGGESTED SPECIFICATION

Two handle widespread lavatory faucet shall feature cast brass valve bodies with flexible hose connections for 6" to 12" installations. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model #7430.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ASME A112.18.1**
- NSF 61/Section 9 and Annex G**
- CSA B125.1**

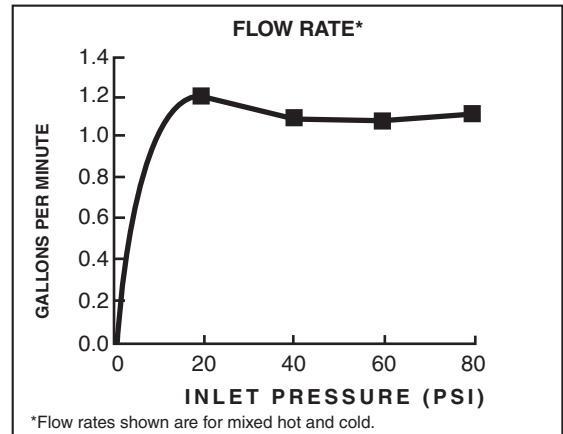

Product Number	Description	ADA	Finish Options	
			Polished Chrome	PVD Brushed Nickel
			002	295
7430.801	Berwick Widespread with metal Speed Connect® Pop-up drain. Metal lever handles.	ADA		
7430.821	Berwick Widespread with metal Speed Connect® Pop-up drain. Metal cross handles.			

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.