

CHAMPION CLASSIC 5' x 36" AIR BATH

Model# 2771.068CH (specify color) Air Bath

- Rejuvenate with an effervescent air spa experience
- EverClean® system*
- Air jets fully surrounding the bathing well
- Variable speed air blower with heater
- Acrylic with fiberglass reinforcement
- Ledge mounted overflow design for maximum water depth
- Deep Soak® drain required (sold separately)
- Designed with undermount installation option
- Automatic purge with timer
- Pre-leveled tub bottom
- Complete factory installed and tested air bath system
- Limited Lifetime warranty including free in-home labor and parts

* American Standard whirlpools and air baths with EverClean® incorporate a safe and effective silver-ion antimicrobial additive right into the circulation piping to protect the pipes from mold, mildew, algae and fungus that could cause deterioration or staining of the pipes.



Nominal Dimensions:

60" x 36" x 21-1/2"
(1524 x 914 x 546mm)

**Compliance Certifications -
Meets or Exceeds the Following Specifications:**

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7/CSA B45.1
- IAPMO Z124.1.2

Components Required:

- Bath Filler**: (specify finish)
- Bath Drain: 1599.500.020 (white only)
1599.205.XXX (colors other than white)

Optional Components:


- Five Foot Apron: 9261.019 (specify color)
- Tile Bead Kit: 751755-100

** See American Standard Faucet Selector

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

**SEE REVERSE FOR ROUGHING-IN DIMENSIONS
AND PRODUCT SPECIFICATIONS**

Air Bath Shown

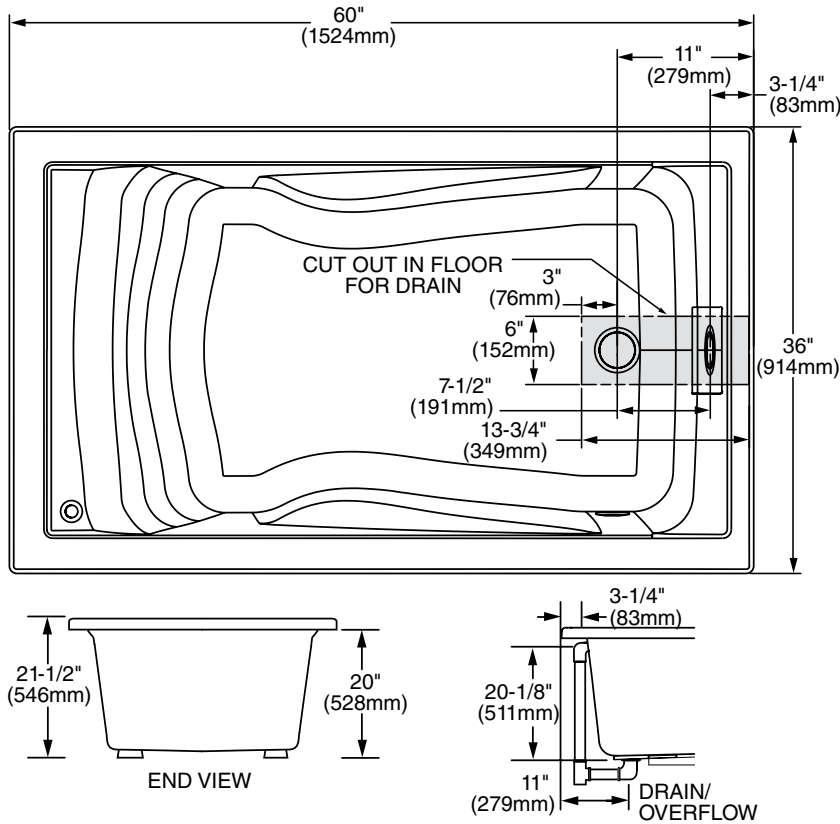

DIMENSIONS OF FIXTURES ARE NOMINAL AND MAY VARY WITHIN THE RANGE OF TOLERANCES ESTABLISHED BY ANSI STANDARDS Z124.1.2 AND A112.19.7

GENERAL SPECIFICATIONS FOR 2771.068CH AIR BATH	
INSTALLED SIZE	60 x 36 x 21-1/2 (1524 x 914 x 546mm)
WEIGHT	75 Lbs. (34 Kgs.)
WEIGHT w/WATER	800 Lbs. (363 Kgs.)
GAL. TO OVERFLOW	87 Gal. (329 L)
BATHING WELL AT SUMP	41-1/4 x 26-1/4 In. (1048 x 667mm)
BATHING WELL AT RIM	52-1/2 x 30 In. (1334 x 762mm)
WATER DEPTH TO OVERFLOW	18-1/2 In. (470mm)
FLOOR LOADING (PROJECTED AREA)	53 Lbs./Sq.Ft. (260 Kgs./Sq.m)
AIR BATH ELECTRICAL SPECIFICATIONS	
BLOWER	1.0 HP, 10 AMPS, 120V.

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUPPORT OF BATH BY SUMP BEDDING. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH AIRBATH FOR ADDITIONAL INFORMATION.

OPTIONAL 3 WALL TILING BEAD. KIT No. 751755-100 AND APRON No. 9261.019 AVAILABLE AND MUST BE ORDERED SEPARATELY.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet