

**ACTICLEAN™ HET RIGHT HEIGHT®
ELONGATED COMPLETE TOILET**

714AA.151

- Self-Cleaning toilet bowl that cleans and removes stains with a simple press of a button.
- **Two Bowl Cleaning Cycles:**
 - **Quick Clean** is best used for regular upkeep in between deep cleanings. A Quick Clean cycle will clean the inside of the toilet bowl in just one minute.
 - **Deep Clean** completely and thoroughly cleans the inside of the toilet bowl in 10 minutes. The result is a fresh scented, sparkling clean bowl!
- Battery Operated Cleaning System: 4AA batteries (included) give you up to 1 year of battery life
- Includes VorMax™ Flush Technology to help maintain a tidy bowl in between ActiClean cleanings Δ
- CleanCurve™ Rim eliminates the rim area where dirt and buildup hide
- EverClean® surface inhibits the growth of stain- and odor-causing bacteria, mold and mildew on the surface
- Vitreous china
- High efficiency (4.8 Lpf/1.28 gpf) toilet
- Meets EPA WaterSense® criteria
- 12" (305mm) rough-in
- Comfortable 16-1/2" rim height for ADA accessible applications
- Superior solid waste removal with 1,000g MaP Score** and a 2-1/16" fully glazed trapway
- Generous 9" x 8" water surface area
- 1-3/4" Dual Injection Flush Valves for optimal bowl rinsing
- Easy Installation. Everything needed for toilet installation is included and can be hand tightened
- Chrome handle (alternative finishes available)
- Robust plastic seat features no slip bumpers and a release button that allows you to remove the seat for quick and easy cleaning
- 2 color-matched bolt hole covers
- 100% factory flush tested
- Lifetime warranty on chinaware, 10 year warranty on mechanical parts, 1 year on electronics and 1 year warranty on seat

Nominal Dimensions (with Lid CLOSED):

30-3/16" x 20-11/16" x 31-3/8"
(767 x 526 x 797mm)

Nominal Dimensions (with Lid OPEN):

30-3/16" x 20-11/16" x 40"
(767 x 526 x 1016mm)

Fixture, toilet seat, wax ring, and bowl bolts only.
Supply line not included.

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2/CSA B45.1 for Vitreous China Fixtures
- US EPA WaterSense® Specification for HET's

** Maximum Performance (MaP) testing performed by IAPMO R&T Lab. MaP Report conducted by Veritec Consulting, Inc. and Koeller and Company.



SELF-CLEANING TANK TOP DEVICE

SEE REVERSE FOR ADDITIONAL
ROUGHING-IN DIMENSIONS

To Be Specified:

- Color: White
- Supply with stop:


EVERCLEAN®
Surface



Δ **Source:** IAPMO R&T Labs Test Report No.109-141486-002, comparing VorMax™ against conventional under-the-rim-water-dispersal toilets from major retailers.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ICC ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.

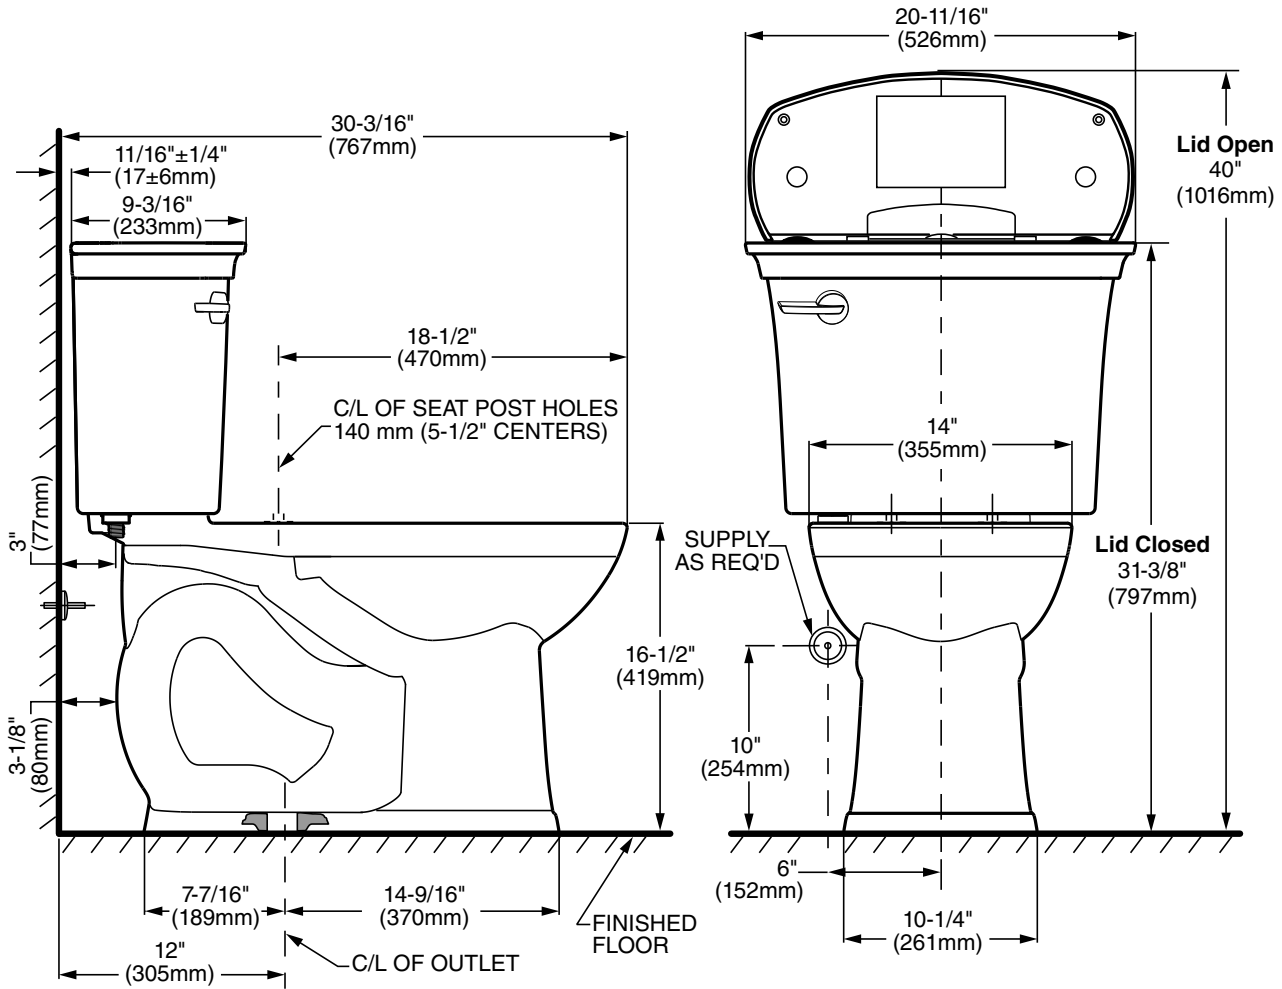

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305mm (12") FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.