


**MODEL NUMBER:**

- **9316.800 Widespread Lavatory**  
Non-metallic Speed Connect™ Pop-up drain.  
Lever handles. Polished Chrome finish.

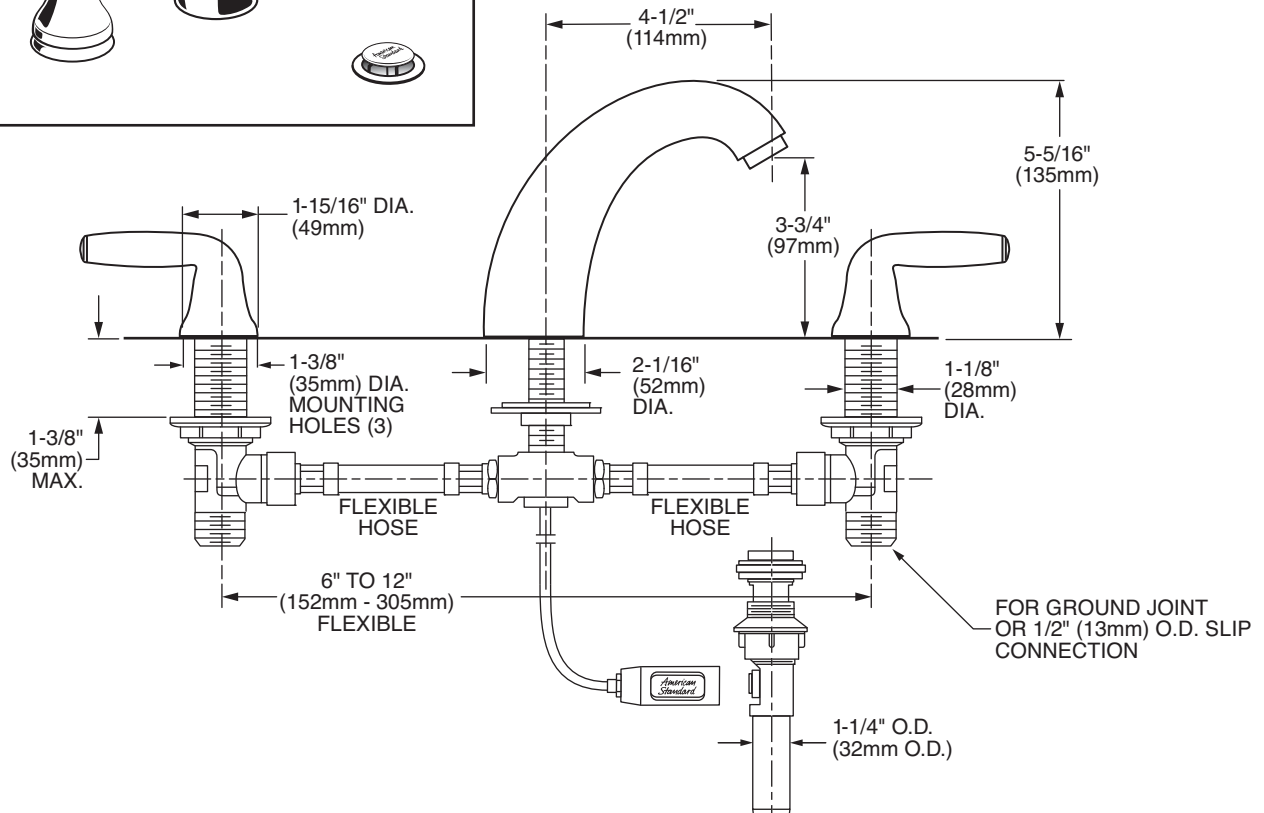

**GENERAL DESCRIPTION:**

Cast brass valve bodies with reinforced flexible hose connections for 6" to 12" (152mm to 305mm) installations. 1/4 turn washerless ceramic disc valve cartridges. Metal spout. One-half inch brass male inlets. 20" (500mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Non-Metallic Speed Connect™ drain body with 1-1/4 inch (32mm) tail piece. 1.5 gpm/5.7L/min. maximum flow rate.

**PRODUCT FEATURES:**

**Ceramic Disc Valve Cartridges:** Smooth handle operation and assures a lifetime of drip-free performance.

**Speed Connect Drain:**

- 1/3 the parts. Installs in 1/3 the time.
- No adjustments required - seals the first time, every time.
- Flexible stainless steel cable - installs effortlessly in tight spaces.

**Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.


**SUGGESTED SPECIFICATION:**

Two handle widespread lavatory faucet shall feature cast brass valve bodies with reinforced flexible hose connections for 6" to 12" installations. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 9316.800.002.


**CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- CSA B 125**
- NSF 61/Section 9 & Annex G**

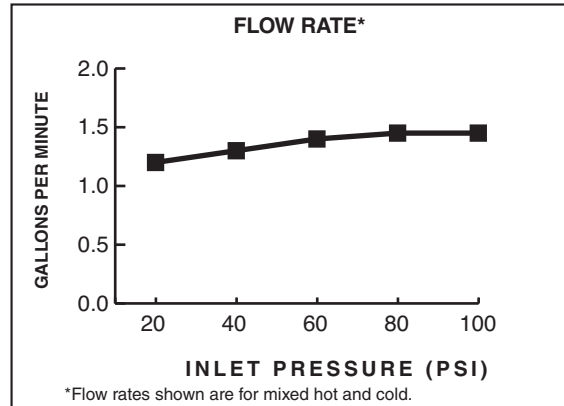

Product Number	Description	Finish Options
		Polished Chrome
9316.800	Lavatory faucet. Lever Handles. Non-Metallic Speed Connect™ Pop-up drain.	002

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.